
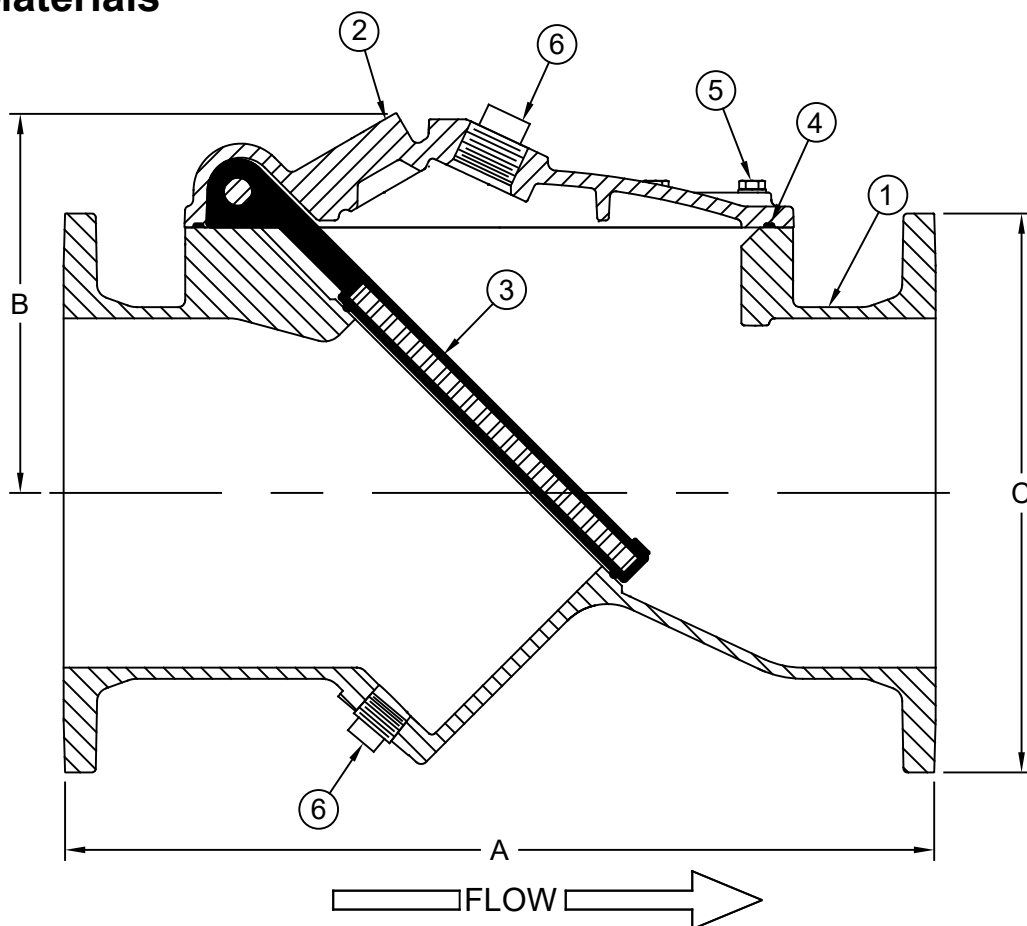


Materials



Max Temp 140°F (60°C)
Max Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM
1	1	Body	Ductile Iron	A536
2	1	Cover	Ductile Iron	A536
3	1	Disc*	Buna coated Steel	-----
4	1	Gasket*	Buna	-----
5	A/R	Cover Bolt	Steel	SAE Grade 5
6	2	Plug	Malleable Iron	-----

Dimensions (150# ANSI B16.42 Flanges)



* Optional EPDM or Viton

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
2	50	2380	8	203	3-3/4	95	6	152	19	9
2-1/2	65	2381	8-1/2	216	3-3/4	95	7	178	25	11
3	80	2382	9-1/2	241	4-7/32	107	7-1/2	191	33	15
4	100	2383	11-1/2	292	4-13/16	122	9	229	38	17

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
6	150	2385	15	381	6-5/16	160	11	279	77	35
8	200	2386	19-1/2	495	8-1/4	210	13-1/2	343	121	55
10	250	2387	24-1/2	622	9-7/8	250	16	406	198	90
12	300	2388	27-1/2	699	11-13/32	290	19	483	309	140

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2023 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

Materials

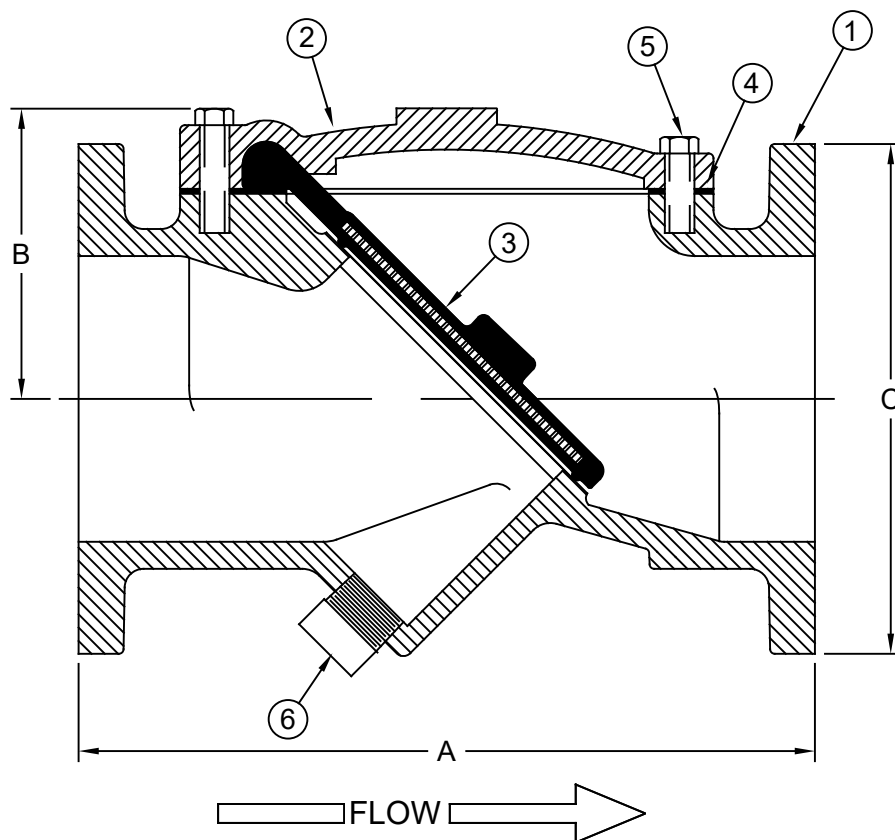

Max Temp 140°F (60°C)
Max Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM
1	1	Body	Ductile Iron	A536
2	1	Cover	Ductile Iron	A536
3	1	Disc*	Buna coated Steel	-----
4	1	Gasket*	Buna	-----
5	A/R	Cover Bolt	Steel	SAE Grade 5
6	1	Plug	Malleable Iron	-----

* Optional EPDM or Viton

Dimensions (150# ANSI B16.42 Flanges)

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
14	350	2390	31	787	13-1/8	333	21	533	661	300
16	400	2391	32	813	15-3/8	391	23-1/2	597	793	360
18	450	2392	36	914	17-1/8	435	25	635	1002	455
20	500	2393	40	1016	19-1/8	486	27-1/2	699	1428	648
24	600	2394	48	1219	22-3/4	578	32	813	1924	873

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2023 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com