

Ball Check Valve




Size 4" / 100 mm

Model 508²



Flomatic Corporation

Materials

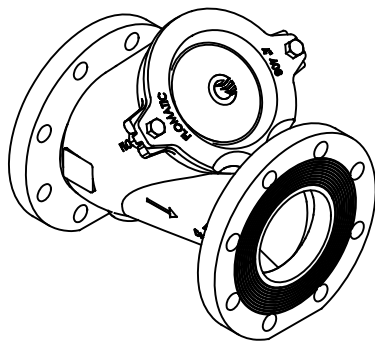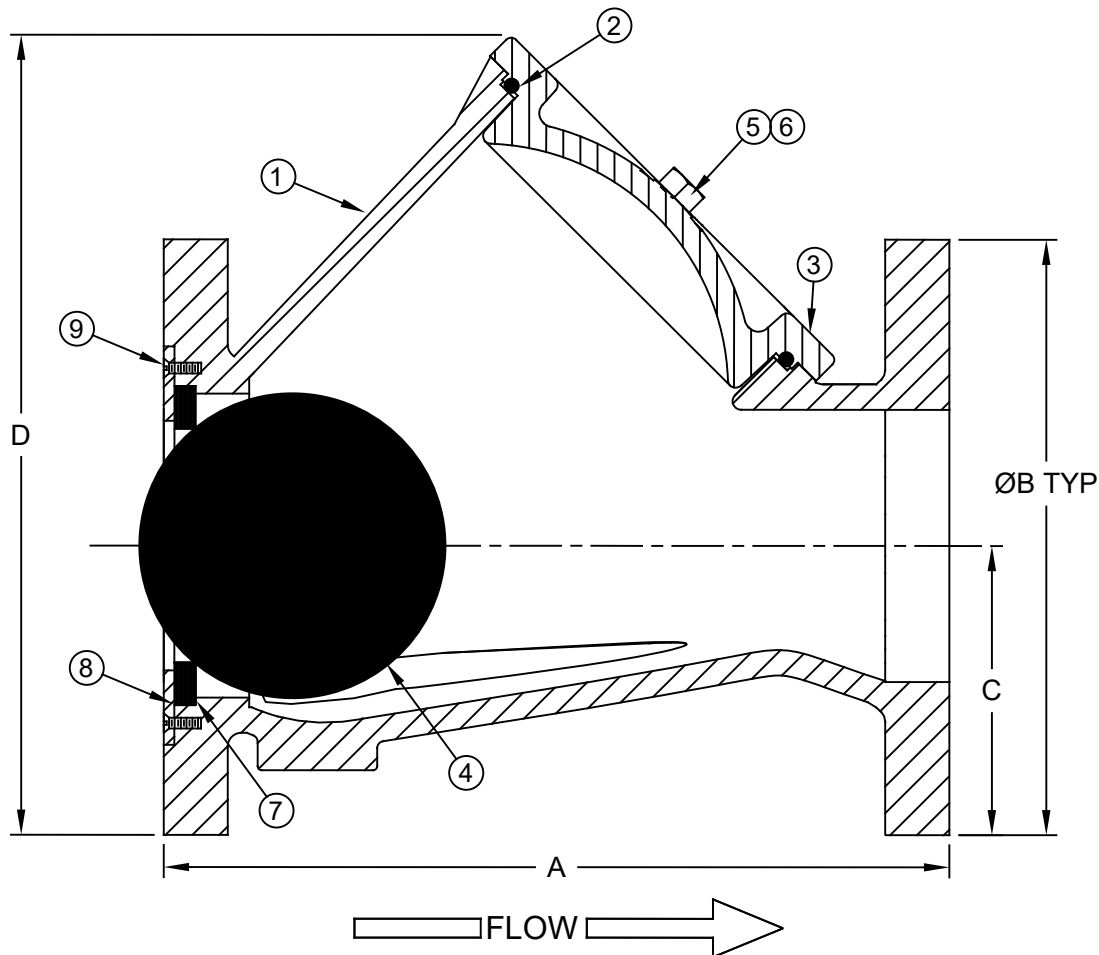

Max Temp 180°F (82°C)
Max Inlet Pressure 150 psi (10 bar)

Item #	Qty	Description	Material	Standard
1	1	Body (Epoxy Coated)	Ductile Iron 65-45-12	ASTM A536
2	1	O-Ring	Buna-N	-----
3	1	Cover (Epoxy Coated)	Ductile Iron 65-45-12	ASTM A536
4	1	Ball (Sinking)*	Phenolic	-----
5	2	Bolt	Stainless Steel 18-8	ASME B18.2.1
6	2	Nut	Stainless Steel 18-8	ASME B18.2.1
7	1	Seal	Polyurethane	-----
8	1	Retaining Ring	Stainless Steel 304	ASTM A240
9	6	Flat Head Cap Screw	Stainless Steel 18-8	ASME B18.2.1

*Optional floating ball available add "FB" to part number

Dimensions (150# ANSI B16.42 Flanges)

Size		Part #	A		ØB		C		D		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
4	100	2045-1	11.50	292	9	229	4.25	108	11.75	298	56	26

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



July 11, 2017
Dwg No:S2045-1 Rev: D (6/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798