

# Ball Check Valve




Sizes 5" & 14" / 125 mm & 350 mm

Model 408




Flomatic Corporation

## Materials

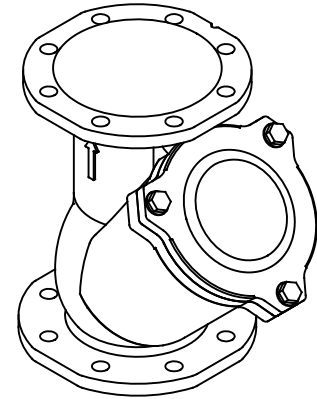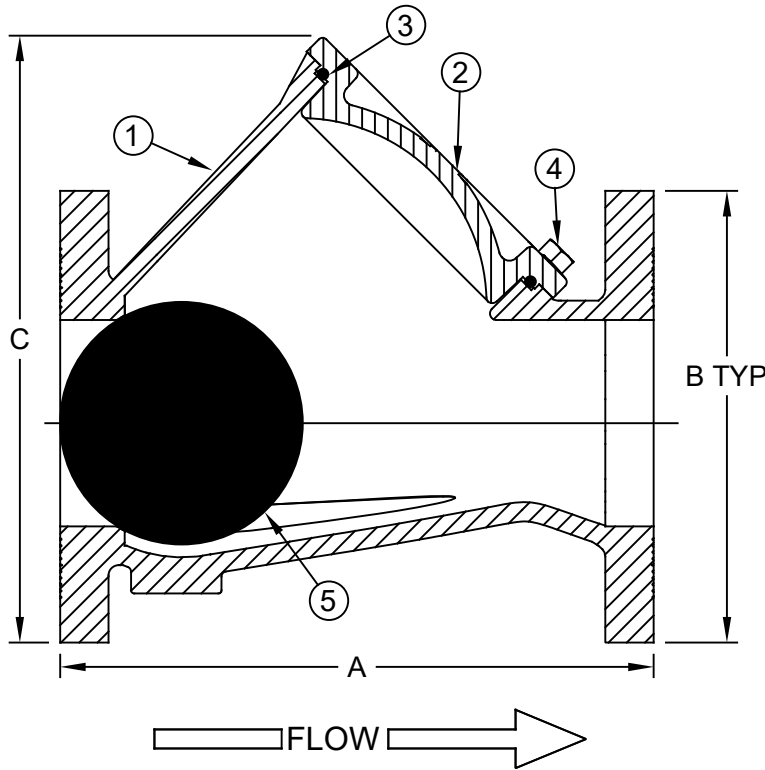

5" CURRENT STYLE

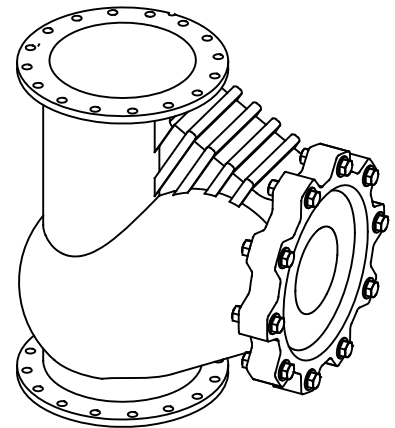

14" CURRENT STYLE

Max Temp 180°F (82°C)  
Max Inlet Pressure 150 psi (10 bar)

Item #	Qty	Description	Material	Standard
1	1	Body (Epoxy Coated)	Ductile Iron	ASTM A536
2	1	Cover (Epoxy Coated)	Ductile Iron	ASTM A536
3	1	O-Ring	Buna-N	-----
4	A/R	Bolt & Washer	Stainless Steel 18-8	ASME B18.2.1
5	1	Ball (Sinking)*	Cast Iron / Buna-N	-----

\*Optional floating ball available add "FB" to part number

## Dimensions (150# ANSI 16.42 Flanges)

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
5	125	2143	13.78	350	9.84	250	14.49	368	62	28
14	350	2150	34.45	875	19.88	505	32.28	820	763	346

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)



September 10, 2003  
Dwg No: S2144-50 Rev: M (6/24)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798