

# Ball Check Valve

# 150# Flange



# Model 408<sup>2</sup>



Sizes 3" & 4" / 80mm & 100mm

Flomatic Corporation

## Materials

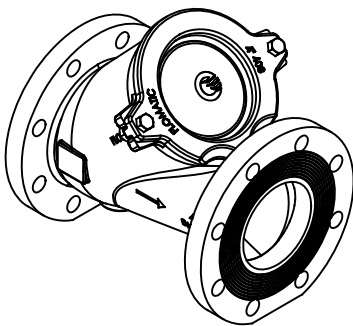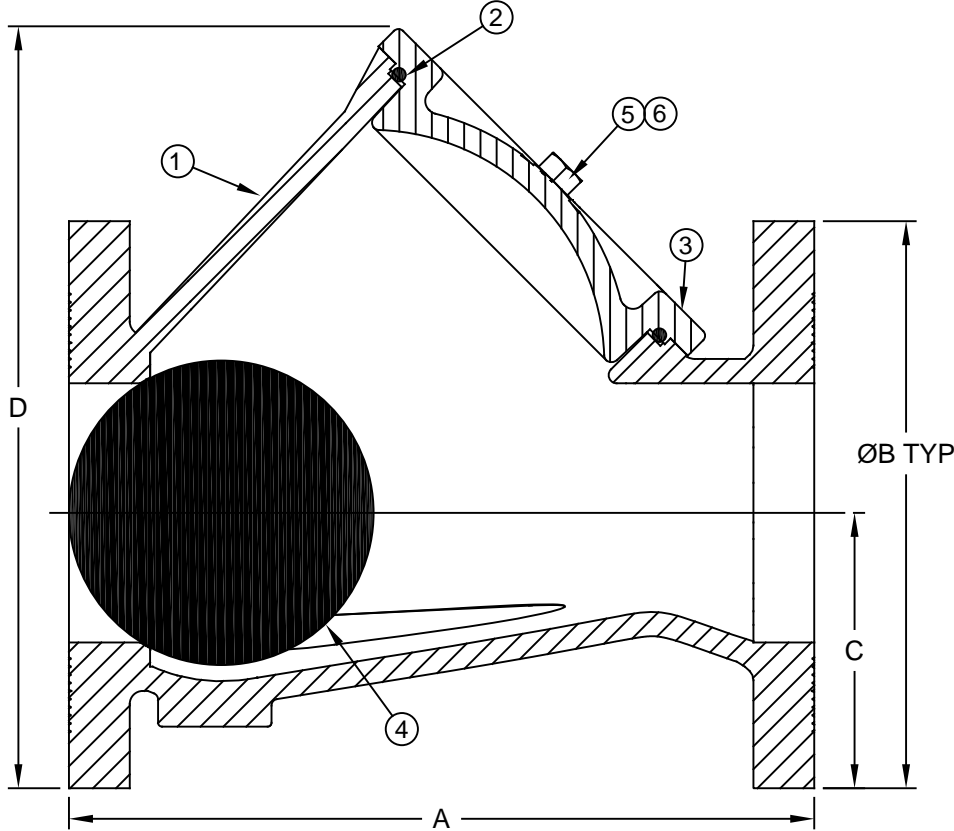

Max Temp 180°F (82°C)  
Max Inlet Pressure 150 psi (10 bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	O'Ring	Buna-n	-----
3	1	Cover (Epoxy Coated)	Ductile Iron	65-45-12
4	1	Ball (sinking)*	Buna-n/Metal Ball	-----
5	2	Bolt	Stainless Steel	18-8
6	2	Nut	Stainless Steel	18-8

## Dimensions (150# ANSI B16.1 Flanges)

\*Optional floating ball available add "FB" to part number  
Not AIS compliant - see separate spec sheet

Size		Part #	A		B		C		D		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
3	80	2144-2	9-1/2	241	7-1/2	191	3-7/64	79	10-1/4	260	37	17
4	100	2145-2	11-1/2	292	9	229	4-1/4	108	11-3/4	298	56	26

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



August 13, 2007  
Dwg No:S408SQUARED Rev: H (3/18)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798