Ball Check Valve

Model 408

Sizes 2" & 4" / 50 mm & 100 mm

FLOMATIC®

Flomatic Corporation

LOW-LEAD IAPMO R&T NSF/ANSI 372

Materials

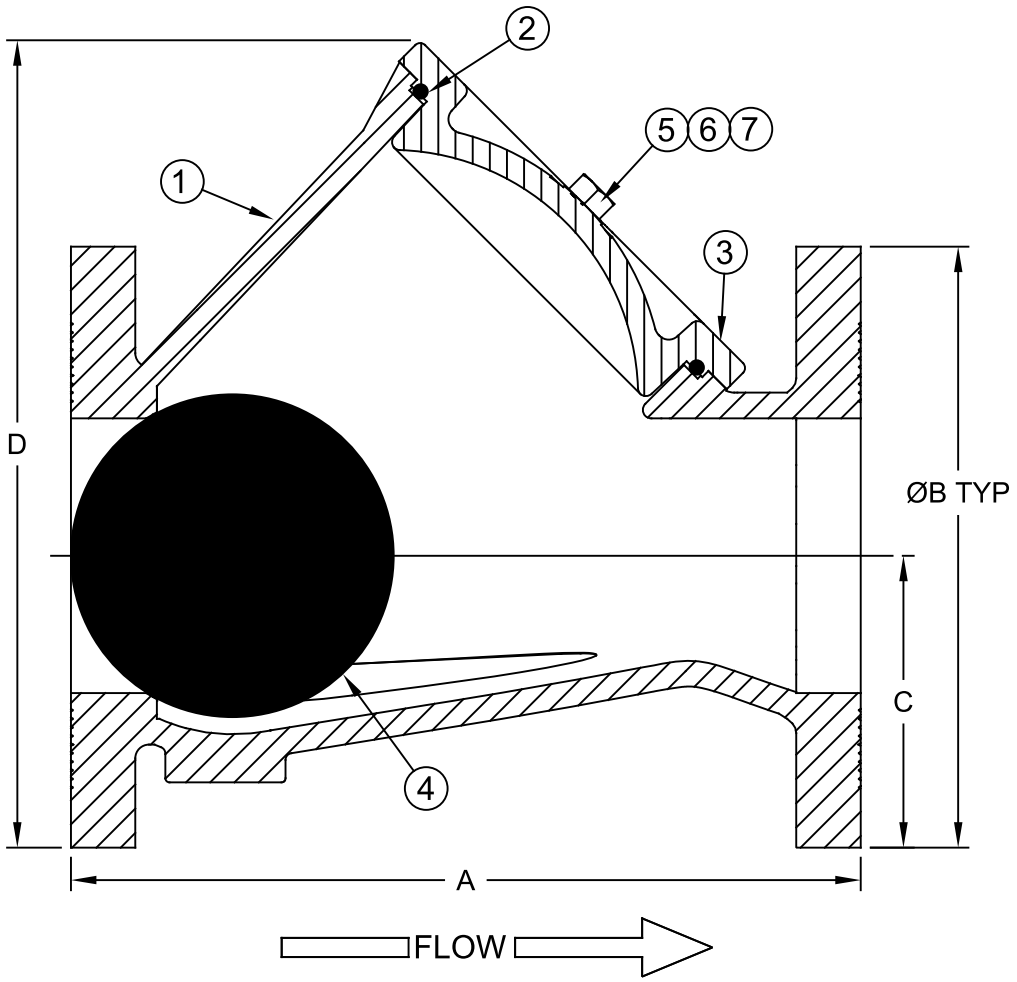

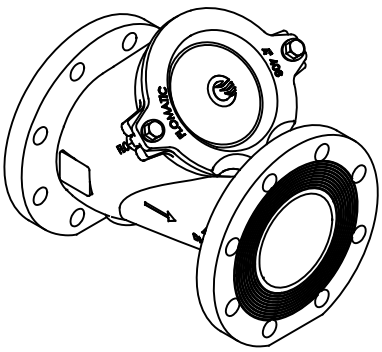

Max Temp 180°F (82°C)
Max Inlet Pressure 150 psi (10 bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	O-Ring	Buna-N	------
3	1	Cover (Epoxy Coated)	Ductile Iron	65-45-12
4	1	Ball (Sinking)*	Buna-N/Metal Ball	------
5	2	Bolt	Stainless Steel	18-8
6	2	Washer	Stainless Steel	18-8
7	2	Nut	Stainless Steel	18-8

*2" is a solid Buna-N ball
Optional floating ball available add "FB" to part number

Not AIS compliant - see separate spec sheet

Dimensions (150# ANSI B16.42 Flanges)

Size		Part #	A		B		C		D		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
2	50	2142-3	8.00	203	6.00	152	3.00	76	7.50	191	17	8
4	100	2145-2	11.50	292	9.00	229	4.25	108	11.75	298	56	26

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2026 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798