

Ball Check Valve


Sizes 2" / 50mm

Model 208

FLOMATIC[®]

Flomatic Corporation

Materials (with Air Bleeder)

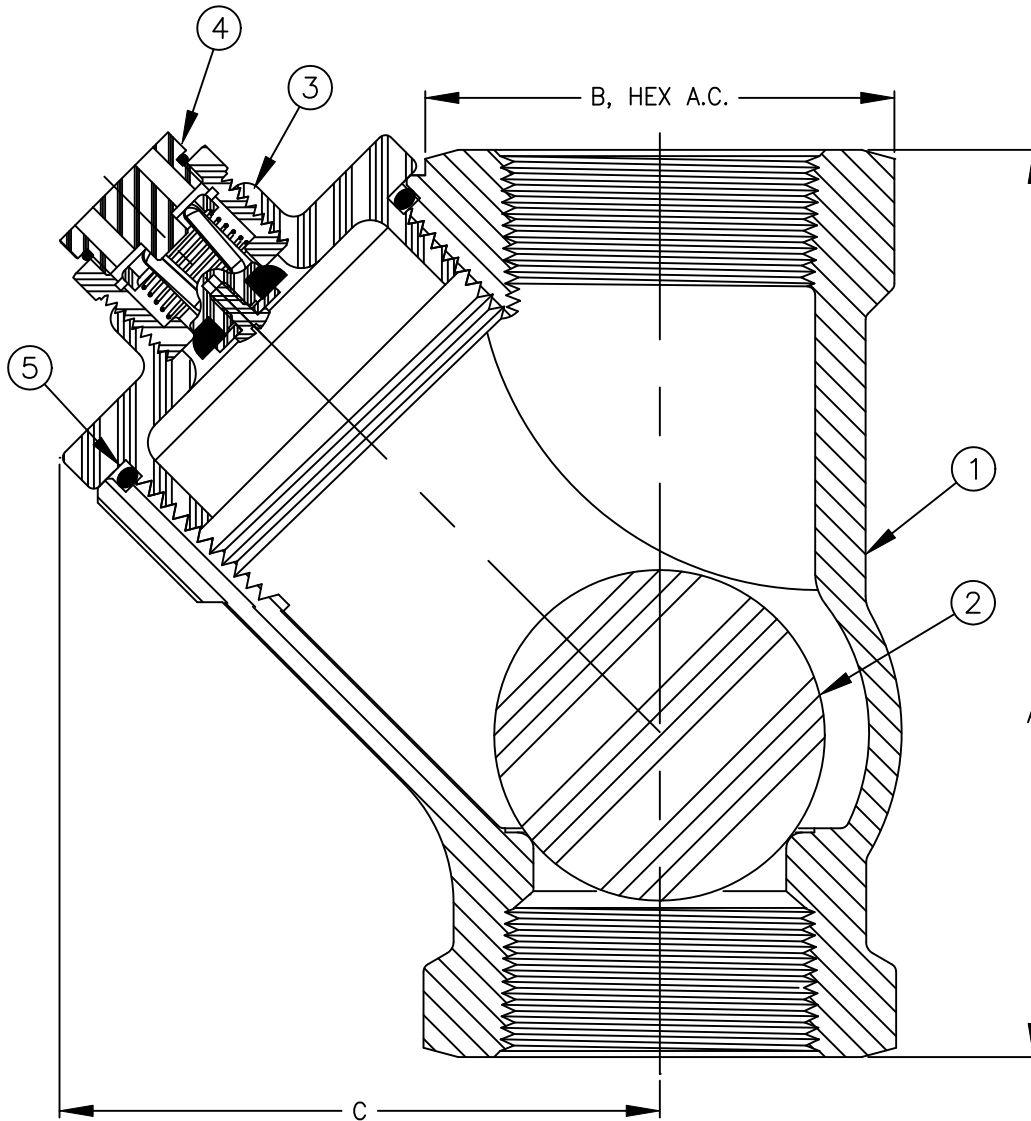

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Cast Iron	A308
2	1	Ball (Sinking)	Nitrile	-----
3	1	Cover	PVC	-----
4	1	Model 77	PVC	-----
5	1	O'Ring	Buna-n	-----

Dimensions

Max Temp 180°F (82°C)
Max Inlet Pressure 150 psi (10 bar)

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
2	50	2142-1	6-3/4	171	3-1/2	89	4-3/16	106	9	4

Danfoss Flomatic can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss Flomatic reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2010 Danfoss Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Danfoss Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Danfoss Flomatic Corp is strictly prohibited.

FLOMATIC[®] VALVES

February 17, 1998
Dwg No: S2142-1 Rev: G (3/13)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798