

Plastic Check Valve


Model 100MP



Flomatic Corporation

Sizes 1" & 1-1/4" / 25mm thru 32mm

Materials

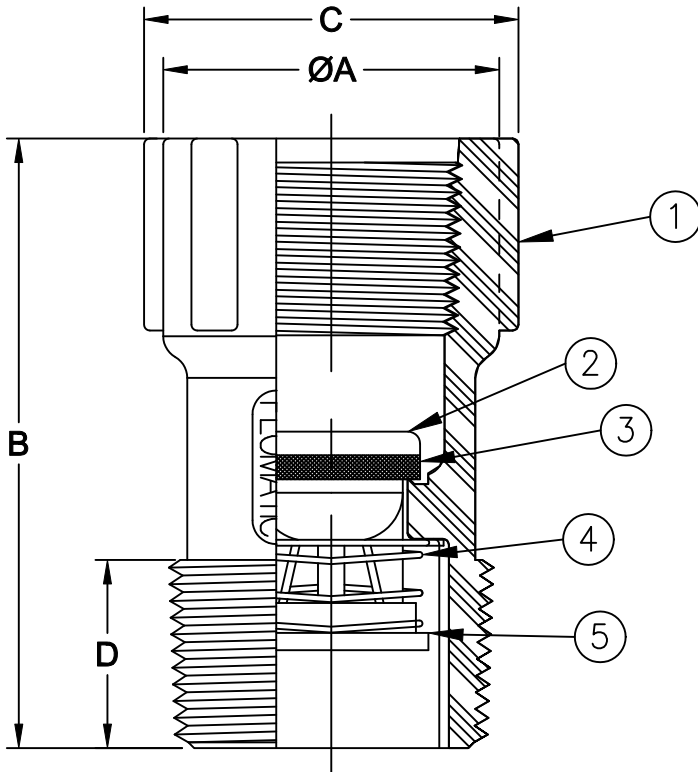

Item #	Qty	Description	Material	ASTM
1	1	Body	Noryl	-----
2	1	Dome	Hostaform	-----
3	1	Seat Disc	Buna-n	-----
4	1	Spring	Stainless Steel	302
5	1	Follower	Hostaform	-----
6	1	Screw (not shown)	Stainless Steel	302

Dimensions

Max Temp 150°F (65°C)
Max Inlet Pressure 300 psi (20 bar)

Size		Part #	F x M NPT	A		B		C		D		Weight	
inch	mm			inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
1	25	4221MP	1 x 1-1/4	1-3/4	44	3-3/16	81	1-61/64	50	63/64	25	.17	.08
1-1/4	32	4242MP	1-1/4 x 1-1/4	2-7/64	53	3-21/64	84	2-5/16	59	15/16	24	.20	.09

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



April 29, 1994
Dwg No: S4221MP Rev G (2/16)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798