


Sizes 1" & 1-1/4" / 25mm & 32mm



Headloss charts are not to be used for valve sizing

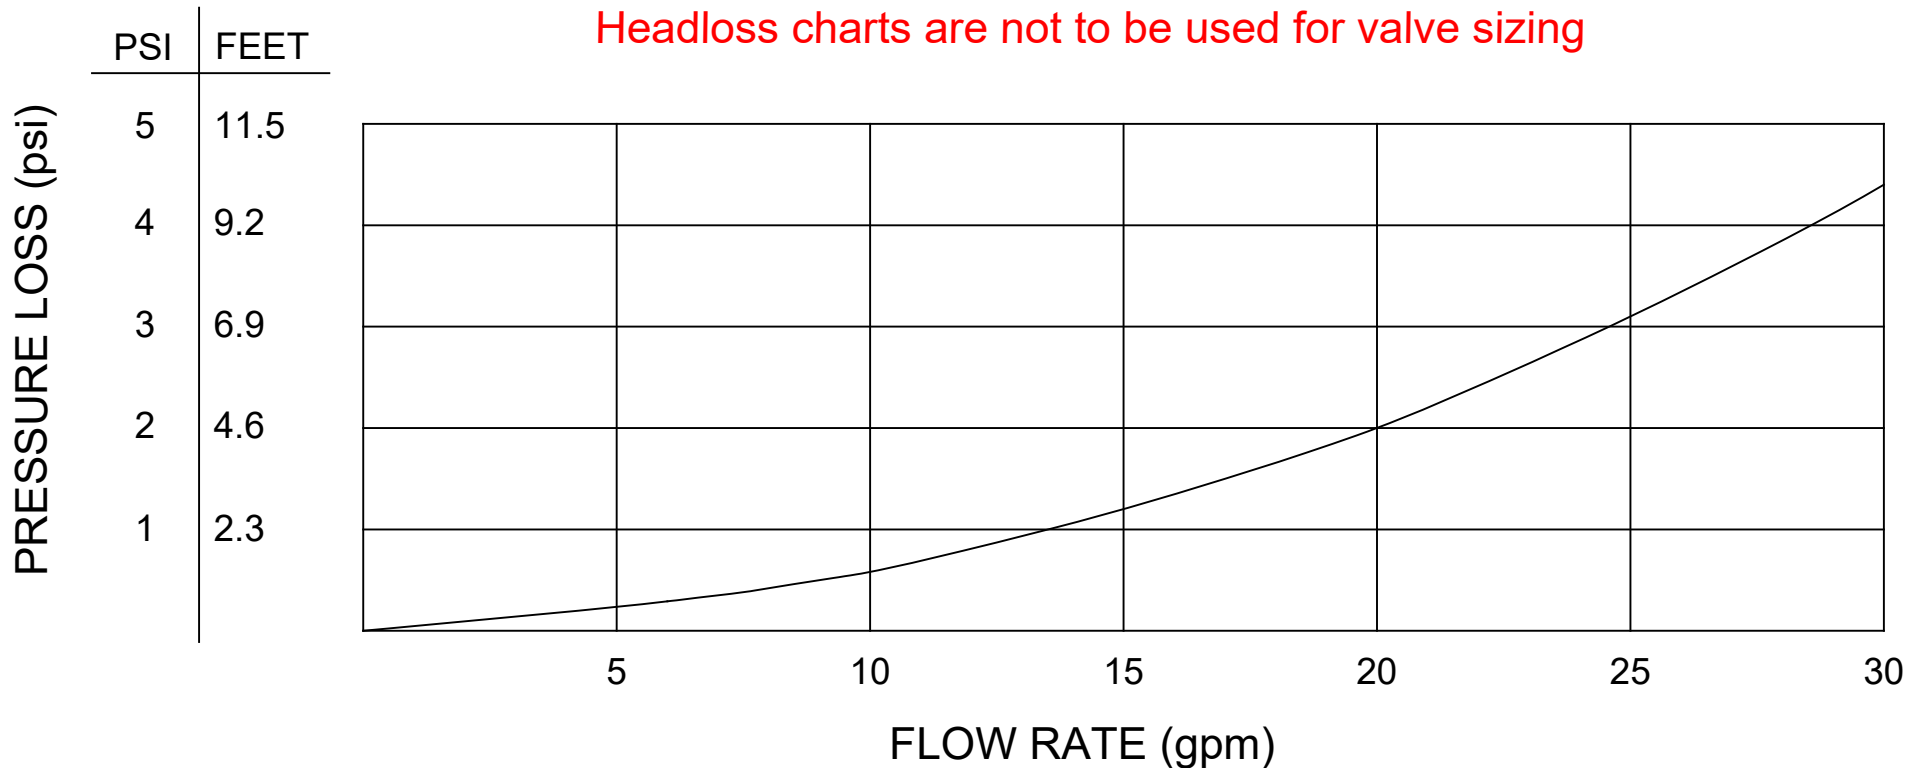

Velocity (ft/sec)				
Size	3 ft/sec	5 ft/sec	8 ft/sec	10 ft/sec
1"	9 gpm	13 gpm	21 gpm	27 gpm
1-1/4"	14 gpm	22 gpm	37 gpm	45 gpm

FLOW RATE (gpm)

verified by independent lab

Size	1-1/4"
Cv	13

Note: For longer service life & higher efficiencies it is recommended that flow velocities be between 3 to 10 feet/second

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited. www.fromatic.com