


Plastic Check Valve

Sizes 1/2" thru 3/4" / 15mm thru 20mm

Model 290P

FLOMATIC[®]
Flomatic Corporation

Materials

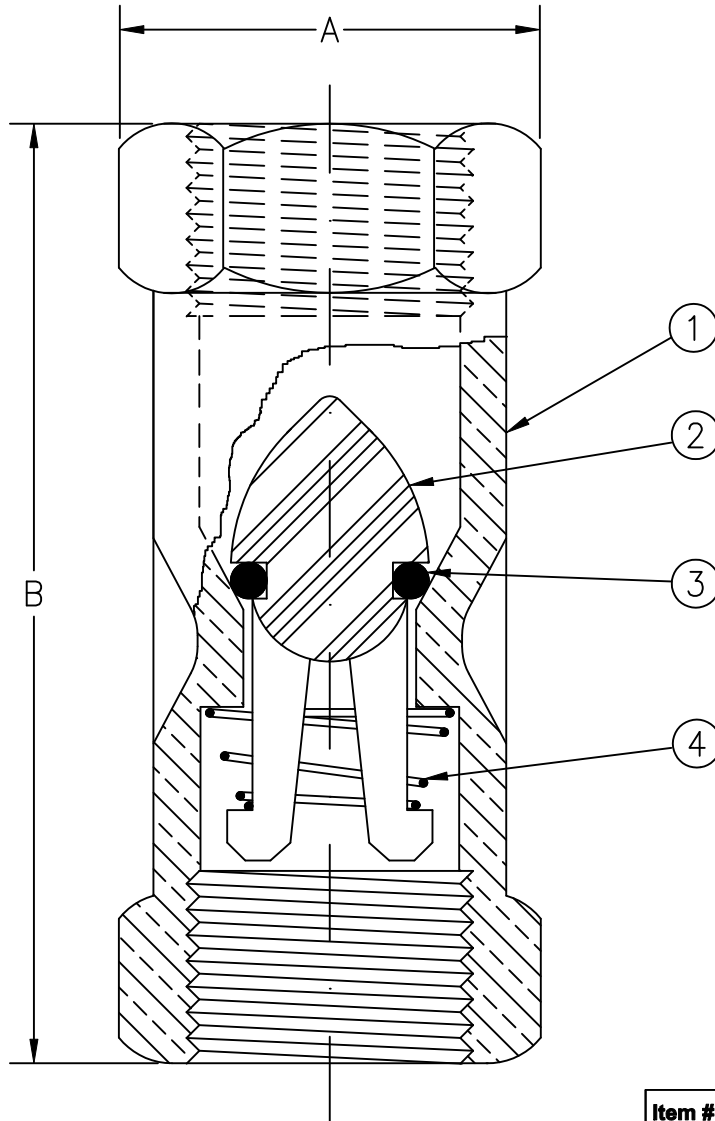

Item #	Qty	Description	Material	ASTM
1	1	Body	Polypropylene	-----
2	1	Poppet	Polypropylene	-----
3	1	O'Ring	Viton	-----
4	1	Spring	Stainless Steel	18-8

Dimensions

Max Temp 180°F (82°C)
Max Inlet Pressure 150 psi (10 bar)

Size		Part #	A		B		Weight	
Inch	mm		Inch	mm	Inch	mm	lbs	kg
1/2	15	5357	1-7/64	28	2-19/32	66	.06	.03
3/4	20	5358	1-11/32	34	3-9/64	80	.09	.04

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2016 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.

FLOMATIC[®] VALVES

January 15, 1998
Dwg No:S290P Rev D (3/16)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798