

Foot Valve

Sizes 1-1/4" / 32 mm



Model 600SE

FLOMATIC[®]

Flomatic Corporation

Materials

Enviro Check[®]

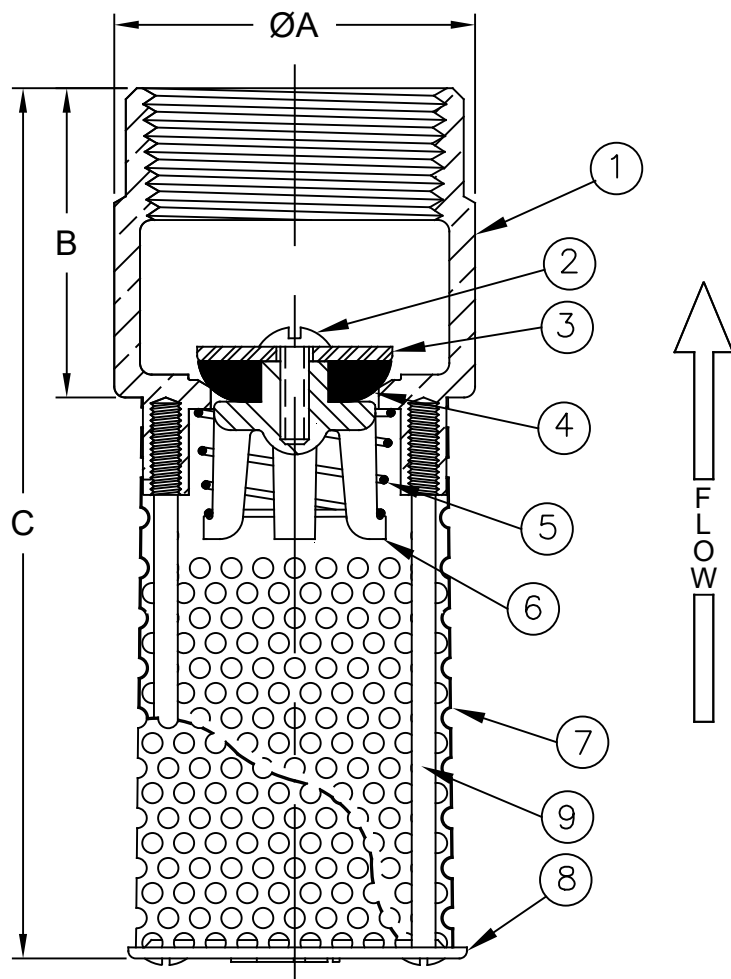

Max Temp 180°F (82°C)
Max Pressure 250psi (18bar)

| Item # | Qty | Description | Material | ASTM |
|--------|-----|--------------|-----------------|--------|
| 1 | 1 | Body | Unleaded Bronze | C89833 |
| 2 | 1 | Screw | Stainless Steel | 18-8 |
| 3 | 1 | Flat Washer* | Stainless Steel | 18-8 |
| 4 | 1 | Disc | Buna-n | N-5007 |
| 5 | 1 | Spring | Stainless Steel | 302 |
| 6 | 1 | Guide | Delrin 100 | NC010 |
| 7 | 1 | Screen | Stainless Steel | 304 |
| 8 | 1 | Cap | Polycarbonate | ----- |
| 9 | 2 | Screw | Stainless Steel | 18-8 |

Washer material is 18-8SS or 304SS
Patent # 4,971,093

Dimensions (FNPT)

ANSI B1.20.1

| Size | | Part # | A | | B | | C | | Weight | |
|-------|----|--------|---------|----|---------|----|---------|-----|--------|-----|
| inch | mm | | inch | mm | inch | mm | inch | mm | lbs | kg |
| 1-1/4 | 32 | 4102E | 1-15/16 | 49 | 1-11/16 | 43 | 4-27/32 | 123 | 21/32 | .36 |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC[®] VALVES

May 28, 2006
Dwg No: S4102E Rev: K (1/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798