

Foot Valve

Model 60SE





Flomatic Corporation

Sizes 2-1/2" Thru 4" / 65 mm Thru 100 mm



Material

Enviro Check®

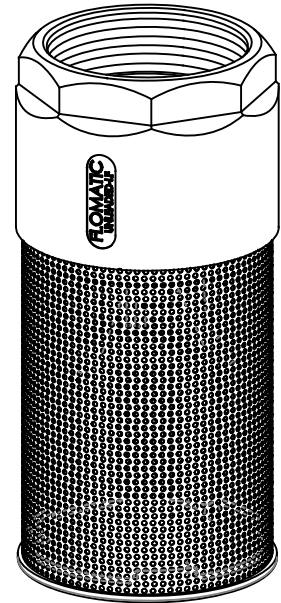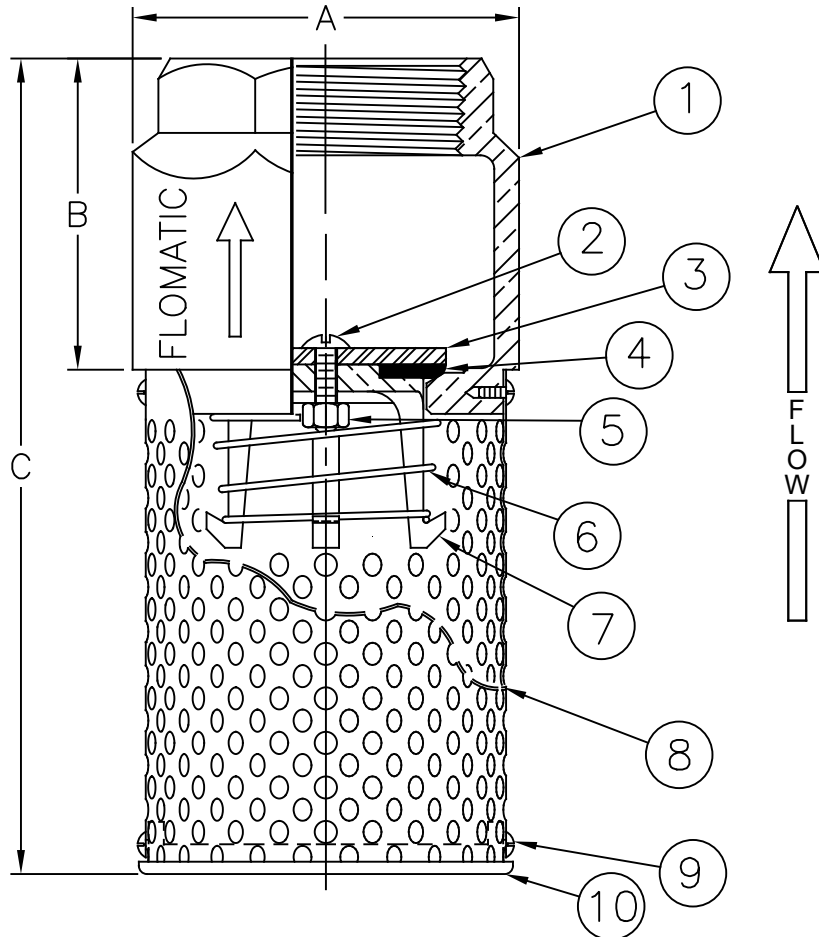

Max Temp 180°F (82°C)
Max Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833	6	1	Spring	Stainless Steel	302
2	1	Bolt	Stainless Steel	18-8	7	1	Guide*	Unleaded Bronze	C89833
3	1	Flat Washer	Stainless Steel	18-8	8	1	Screen	Stainless Steel	304
4	1	Disc	Buna	N-5007	9	6	Screw	Stainless Steel	302
5	A/R	Nut	Stainless Steel	304	10	1	Cap	Unleaded Bronze	C89833

* Guide for the 4" is 316 Stainless Steel

Dimensions (FNPT)

ANSI B1.20.1

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
2-1/2	65	4106E	3-21/32	93	2-59/64	74	8-1/16	205	6	2.8
3	80	4107E	4-9/16	116	3-13/32	97	9-9/16	243	11	5
4	100	4108E	6-1/8	156	4-1/4	108	12-13/32	315	19	8.6

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rightS reserved. ©2021 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



February 28, 2005
Dwg No: S4106E-8 Rev: H (11/21)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798