
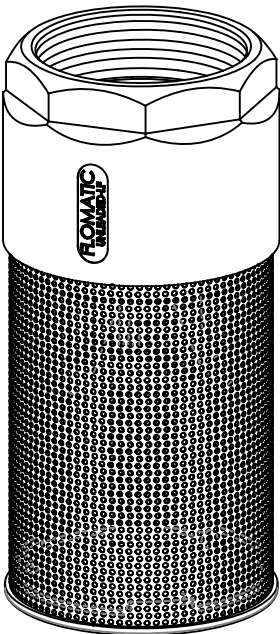


Material

Enviro Check®

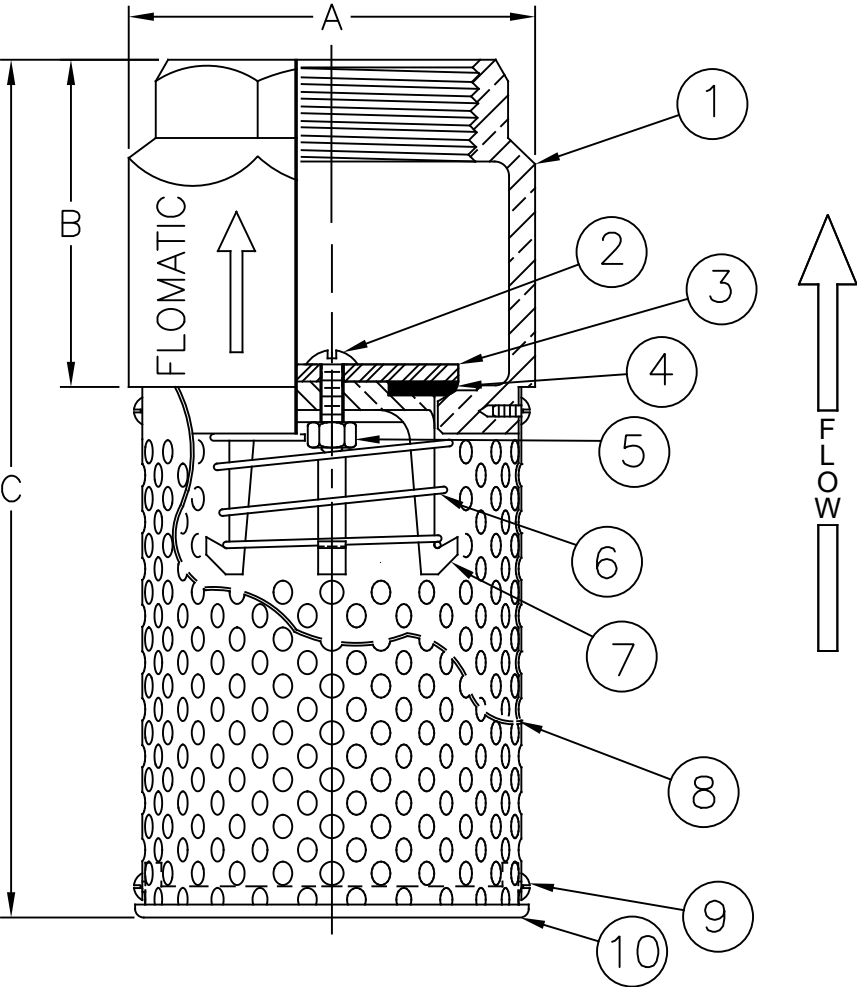

Max Temp 180°F (82°C)
Max Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833	6	1	Spring	Stainless Steel	302
2	1	Bolt*	Stainless Steel	304	7	1	Guide*	Unleaded Bronze	C89833
3	1	Washer*	Stainless Steel	304	8	1	Screen	Stainless Steel	304
4	1	Disc	Buna	N-5007	9	2	Screw**	Stainless Steel	316
5	A/R	Nut	Stainless Steel	304	10	1	Cap	Unleaded Bronze	C89833

Dimensions (FNPT)

* Guide for the 4" is 316SS, Bolt & Washer is 18-8SS
** Screw for the 3" & 4" is 18-8 or 302SS

ANSI B1.20.1

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
2-1/2	65	4106E	3-21/32	93	2-59/64	74	8-1/16	205	6	2.8
3	80	4107E	4-9/16	116	3-13/32	97	9-9/16	243	11	5
4	100	4108E	6-1/8	156	4-1/4	108	12-13/32	315	19	8.6

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com