


Sizes 1-1/4" Thru 8" / 32mm Thru 200mm

Flomatic Corporation

Material

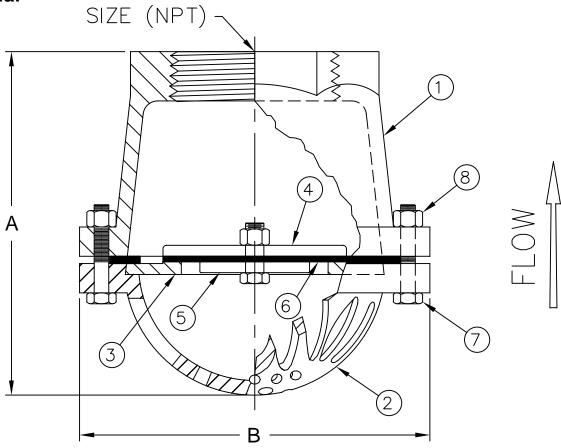

Max Temp 80°F (27°C) Max Pressure 20psi (1.4bar)

| Item # | Qty | Description | Material | ASTM | Item # | Qty | Description | Material | ASTM |
|--------|-----|-------------|-----------|------|--------|-----|-------------|-------------|------|
| 1 | 1 | Body | Cast Iron | A-48 | 5 | 1 | Weight | Cast Iron | A-48 |
| 2 | 1 | Strainer | Cast Iron | A-48 | 6 | 1 | Seal | Leather | |
| 3 | 1 | Seat | Cast Iron | A-48 | 7 | A/R | Hex Bolt | Zinc Plated | |
| 4 | 1 | Weight | Cast Iron | A-48 | 8 | A/R | Hex Nut | Zinc Plated | |

A/R=Amount Required

Dimensions

| Size | | Don't # | А | | В | | Weight | |
|-------|-----|---------|----------|-----|--------|-----|--------|-----|
| inch | mm | Part # | inch | mm | inch | mm | lbs | kg |
| 1-1/4 | 32 | 4962 | 4-1/8 | 105 | 4-7/8 | 124 | 3 | 1.3 |
| 1-1/2 | 40 | 4963 | 4-1/8 | 105 | 4-7/8 | 124 | 3 | 1.3 |
| 2 | 50 | 4964 | 5-1/4 | 133 | 5-7/8 | 149 | 6 | 2.7 |
| 3 | 80 | 4966 | 7-1/8 | 181 | 7-1/2 | 191 | 13 | 5.9 |
| 4 | 100 | 4967 | 9 | 229 | 9 | 229 | 20 | 9.1 |
| 6 | 100 | 4969 | 12 | 305 | 11-3/8 | 289 | 45 | 20 |
| 8 | 100 | 4970 | 15-11/16 | 398 | 15-1/8 | 384 | 99 | 45 |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2020 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written

