Foot Valve

Model 357

Sizes 1-1/4" Thru 8" / 32mm Thru 200mm

FLOMATIC®
Flomatic Corporation

ALS
NSF/ANSI/CAN 372

Material

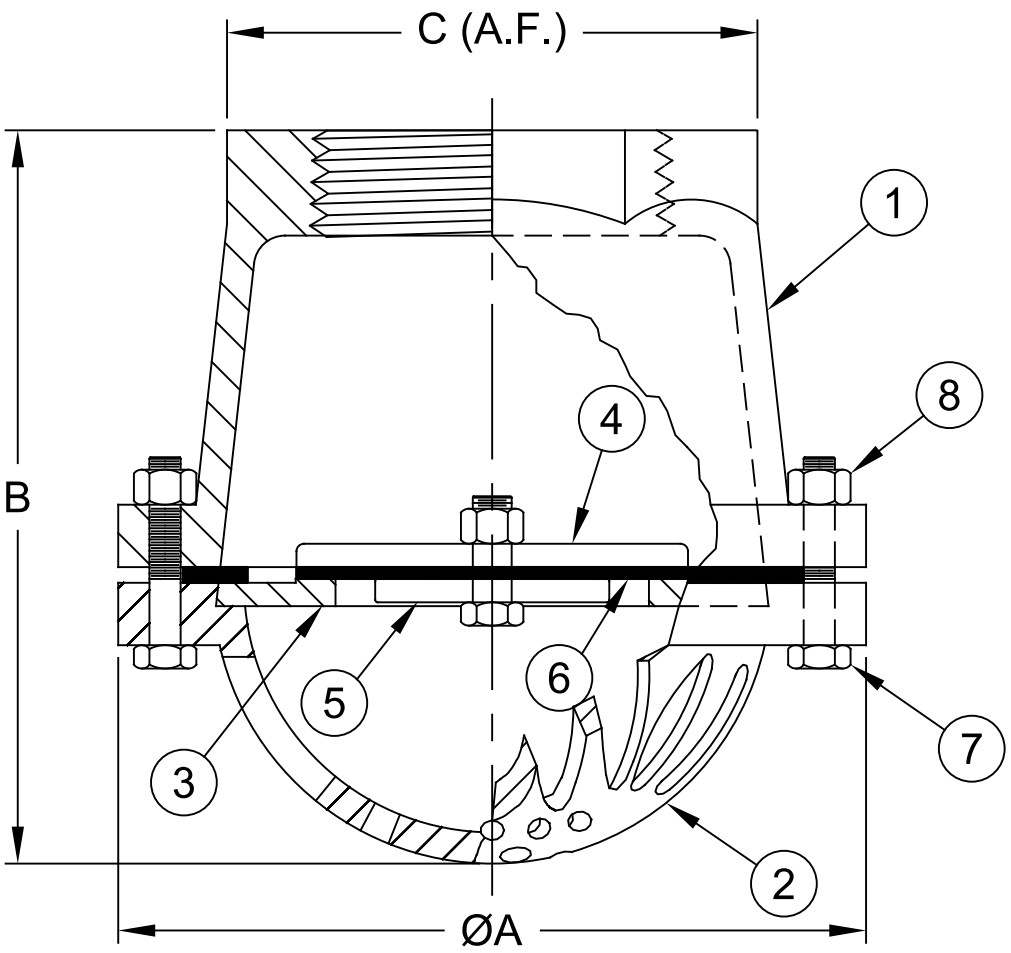

Max Temp 80°F (27°C)
Max Pressure 20psi (1.4bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Cast Iron	A-48	5	1	Weight	Cast Iron	A-48
2	1	Strainer	Cast Iron	A-48	6	1	Seal	Leather	-----
3	1	Seat	Cast Iron	A-48	7	A/R	Hex Bolt	Zinc Plated	-----
4	1	Weight	Cast Iron	A-48	8	A/R	Hex Nut	Zinc Plated	-----

A/R=Amount Required

Dimensions (FNPT)

ANSI B1.20.1

Size		Part #	ØA		B		C (A.F.)		NPT	Weight	
inch	mm		inch	mm	inch	mm	inch	mm		lbs	kg
1-1/4	32	4962	3.38	86	4.13	105	2.63	69	1-1/4	3.4	1.5
1-1/2	40	4963	3.38	86	4.13	105	2.63	69	1-1/2	3.2	1.5
2	50	4964	5.25	133	5.25	133	3.31	84	2	6.5	2.9
3	80	4966	6.25	159	7.19	183	4.56	116	3	12.3	5.6
4	100	4967	7.69	195	8.88	226	5.56	141	4	20.5	9.3
6	100	4969	10.06	256	12.00	305	7.75	197	6	44.7	20.3
8	100	4970	13.75	349	15.50	394	10.13	257	8	95	43.1

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2025 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC® VALVES

August 12, 1994
Dwg No: S4964-70 Rev: H (4/25)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798