

Foot Valve


Globe Style

Model 302BT




Flomatic Corporation

Sizes 2" Thru 6" / 50 mm Thru 150 mm



Material

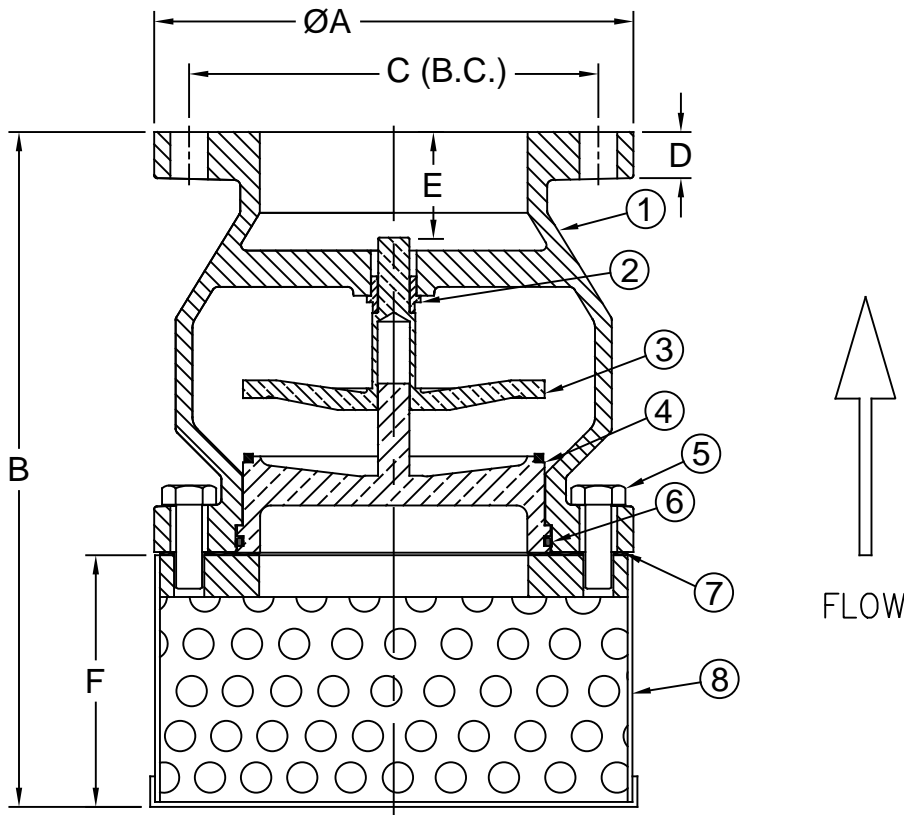

Open Area: 58-60%
 Max Temp 180°F (82°C)
 Max Pressure 180psi (14bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body (epoxy coated)	Cast Iron	Class 30	5	AR	Bolt	Zinc Plated Steel	-----
2	1	Bushing	Bronze	C95400	6	1	O'Ring	EPDM	-----
3	1	Poppet	Bronze	C89833	7	1	Gasket	Vellumoid	-----
4	1	Seat Ring	Bronze	C89833	8	1	Strainer Basket	Stainless Steel	304

AR=Amount Required

Dimensions (ANSI Class 125# Flange)

Size		Part #	A		B		C		D		E		F		Bolt Size	# of Bolts	Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm			lbs	kg
2	50	4763BT	6	152	8-21/64	212	4-3/4	121	5/8	16	61/64	24	3	76	5/8	4	23	10
2-1/2	65	4768BT	7	178	8-19/32	218	5-1/2	140	11/16	17	1-1/16	27	3	76	5/8	4	30	14
3	80	4769BT	7-1/2	191	9-9/64	232	6	152	3/4	19	1-1/16	27	3	76	5/8	4	37	17
4	100	4770BT	9	229	10-3/8	264	7-1/2	191	15/16	24	1-9/16	40	3	76	5/8	8	63	29
5	125	4771BT	10	254	12-41/64	321	8-1/2	216	15/16	24	1-3/4	44	4	102	5/8	8	80	36
6	150	4772BT	11	279	15-7/8	403	9-1/2	241	1	25	2-29/64	62	6	152	3/4	8	100	45

Patent # 6,024,121

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



June 25, 2004
 Dwg No: S302bt-1 Rev: F (11/18)

FLOMATIC CORPORATION
 GLENS FALLS, N.Y. 12801
 PHONE (518) 761-9797
 FAX (518) 761-9798