
Sizes 2" Thru 4" / 50mm Thru 100mm

Flomatic Corporation

Materials



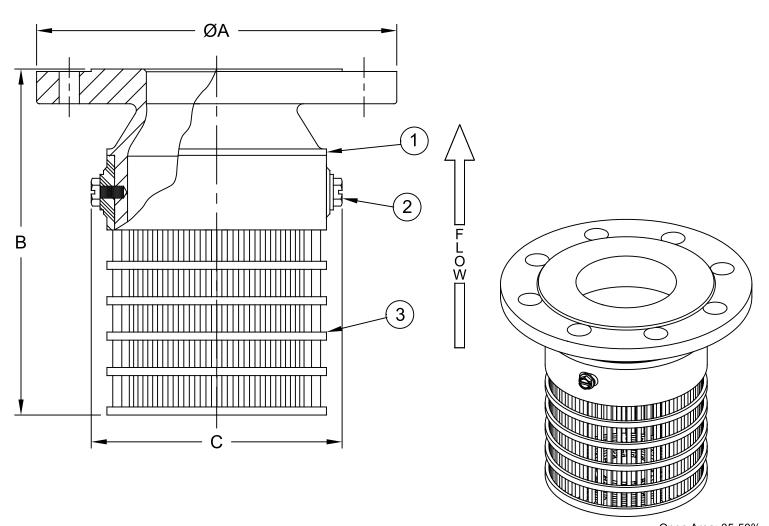

Open Area: 35-50% Max Temp 180°F (82°C) Max Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Flange (Epoxy Coated)	Cast Iron	A-48	3	1	Screen	Polyprorylene	
2	2	Type F Screw	Plated Steel						

Dimensions (125# ANSI B16.1 Flanges)

Size		D 1 "	ØA		E	3	С		Weight	
inch	mm	Part #	inch	mm	inch	mm	inch	mm	lbs	kg
2	50	5814P	6.50	165	5.00	127	3.98	101	4.5	2.0
2-1/2	65	5815P	7.28	185	5.87	149	4.72	120	6.0	2.8
3	80	5816P	8.00	203	7.05	179	5.63	143	8.3	3.8
4	100	5817P	8.75	222	8.46	215	6.85	174	10.5	4.8

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2025 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

