


Strainer

Sizes 10" & 12" / 250 mm & 300 mm



Material (Cast Iron)

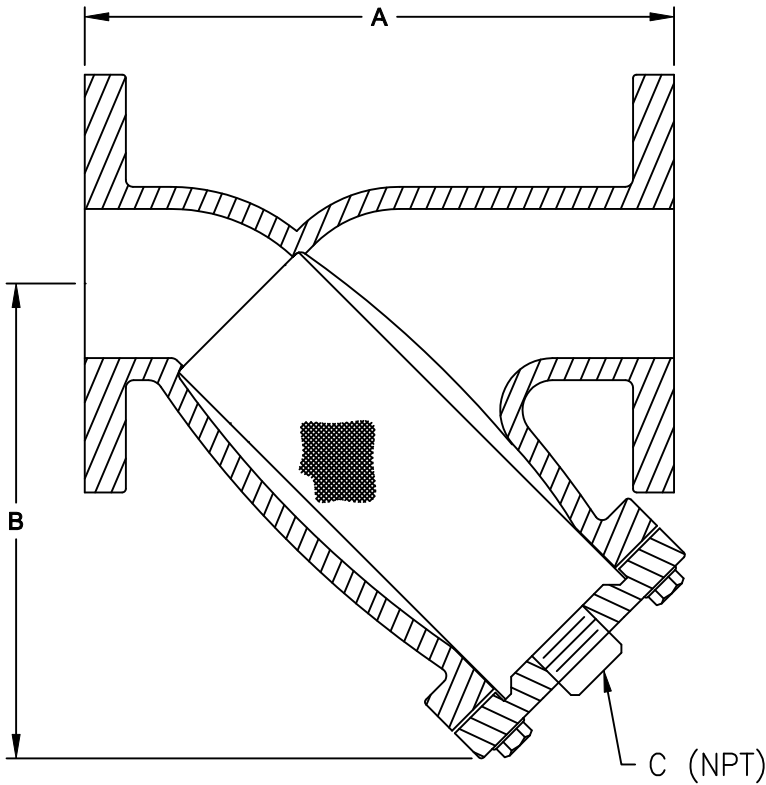

ANSI 125# Flange

Perforated 304 SS screen

Rated 200 psi WOG & 125 psi WSP

Conforms to ANSI B16.1

Maximum Temp 450° F

Dimensions

Size		Part #	A		B		C (NPT)		Perf Size	Holes per sq/in	Weight	
Inch	mm		Inch	mm	Inch	mm	Inch	mm			lbs	kg
10	250	87150	26	660	19.02	483	2	50	1/8"	32	372	169
12	300	87151	30	762	22.05	560	2	50	1/8"	32	539	244

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2016 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



June 16, 2015
Dwg No: S87150 Rev B (3/16)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798