
## **Foot Valve**

Sizes 3" Thru 12" / 75 mm Thru 300 mm

## **Materials**





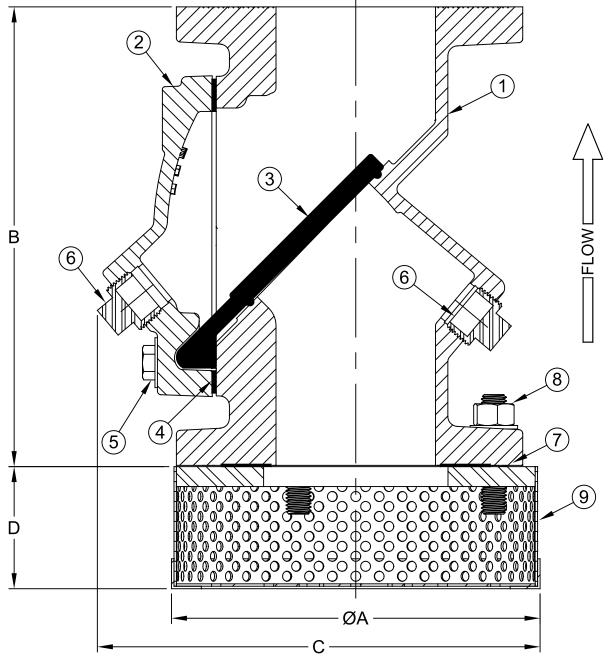

Open Area: 50-60% Max Temp 140°F (60°C) Max Pressure 250psi (18bar)

| ltem # | Qty | Description          | Material          | ASTM     | ltem #                                | Qty | Description       | Material        | ASTM |  |
|--------|-----|----------------------|-------------------|----------|---------------------------------------|-----|-------------------|-----------------|------|--|
| 1      | 1   | Body (Epoxy Coated)  | Ductile Iron      | 65-45-12 | 6                                     | 2   | Plug              | Stainless Steel | 304  |  |
| 2      | 1   | Cover (Epoxy Coated) | Ductile Iron      | 65-45-12 | 7                                     | 1   | Gasket            | Vellumoid       |      |  |
| 3      | 1   | Disc*                | Buna (w/ DI disc) | EP5360   | 8                                     | 4   | Stud / Washer     | Stainless Steel | 304  |  |
| 4      | 1   | Gasket               | Buna              |          | 9                                     | 1   | Strainer Assembly | Stainless Steel | 316  |  |
| 5      | A/R | Cover Bolt / Washer  | Stainless Steel   | 304      | * Optional EPDM or Viton Coated Steel |     |                   |                 |      |  |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2025 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited, www.flomatic.com




## **Foot Valve**

Sizes 3" Thru 12" / 75 mm Thru 300 mm





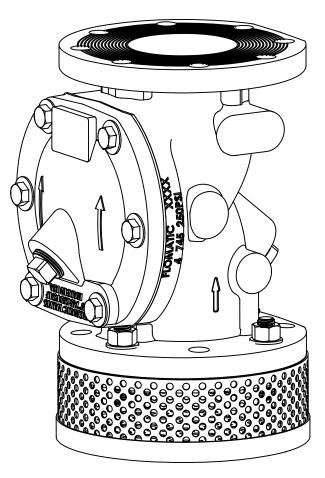

## **Dimensions (150# ANSI B16.1 Flanges)**

| Size |     | <b>-</b> | ØA    |     | В     |     | С     |     | D    |     | Weight |     |
|------|-----|----------|-------|-----|-------|-----|-------|-----|------|-----|--------|-----|
| inch | mm  | Part #   | inch  | mm  | inch  | mm  | inch  | mm  | inch | mm  | lbs    | kg  |
| 3    | 80  | 3382F    | 7.75  | 197 | 9.60  | 244 | 9.51  | 242 | 3    | 80  | 48     | 22  |
| 4    | 100 | 3383F    | 9.25  | 260 | 11.60 | 295 | 11.11 | 282 | 3    | 80  | 70     | 32  |
| 6    | 150 | 3385F    | 11.25 | 286 | 14.06 | 357 | 13.21 | 336 | 6    | 150 | 124    | 57  |
| 8    | 200 | 3386F    | 13.75 | 349 | 19.64 | 499 | 16.66 | 423 | 8    | 200 | 260    | 118 |
| 10   | 250 | 3387F    | 16.25 | 413 | 24.62 | 625 | 20.12 | 511 | 10   | 250 | 417    | 190 |
| 12   | 300 | 3388F    | 19.25 | 489 | 27.56 | 700 | 22.50 | 572 | 12   | 300 | 630    | 286 |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2025 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

