FLOMATIC® VALVES

MODEL 92LW SWING CHECK VALVE

HORIZONTAL-TO-VERTICAL CONVERSION MADE SIMPLE

Flomatic's Model 92LW Swing Check Valve is designed in accordance with AWWA C508 Standard and engineered with in-field adaptability in mind, giving you the flexibility to convert from a horizontal to vertical orientation quickly and confidently. Whether site conditions change or application requirements evolve, the 92LW's practical design minimizes downtime while maintaining dependable reverse flow protection.

With straightforward adjustment steps and a maintenance-friendly construction, operators and engineers can seamlessly reposition the valve without compromising performance. The result: a versatile, installation-ready solution that keeps projects moving and systems operating efficiently.

01

1. Starting Horizontal Position

02

2. Remove Set Screw

03

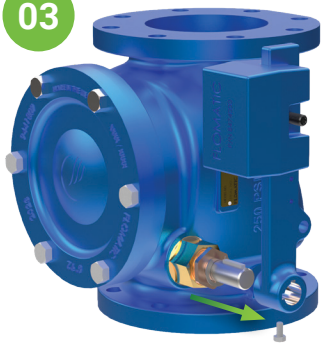

3. Remove Lever and Weight from Shaft

04

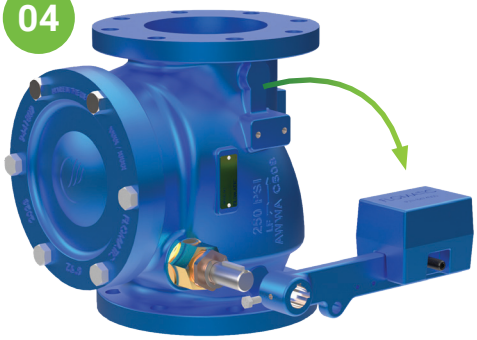

4. Rotate to Position

05

5. Put Lever and Weight onto Shaft

06

6. Tighten Set Screw, Ending Vertical Position

Need Help? Contact Technical Support
From product configuration to field installation support, Flomatic's valve experts can help ensure the Model 92LW is set up for optimal performance.

Inside Sales/Technical Support
Phone: 518-761-9797 Ext. 3
Email: rfq@flomatic.com

10/2026-57