


## Danfoss Flomatic Corporation

15 Pruyn's Island Drive  
Glens Falls, NY 12801-4421  
Tel: 800-833-2040  
Direct Tel: (518) 761-9797  
Direct Fax: (518) 761-9788  
[www.flomatic.com](http://www.flomatic.com)

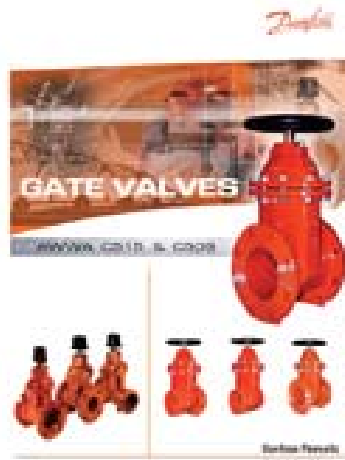

**Glens Falls, NY-** Danfoss Flomatic Corporation has introduced their new four color- bulletin covering their new AWWA C515 Gate Valves. These new gate valves feature three different connection types such as push-on, flange x flange, and mechanical joint. The valves are fusion bonded epoxy coated and are available with a standard 2” operating nut or optional hand wheel. The non-rising stem flange x flange gate valves are available in 2 ½” – 16” and the non-rising stem push-on and mechanical joint gate valves are available in 2 ½” – 12”. These gate valves are designed for installation on potable water lines, irrigation systems, waterworks connections and fire systems. Danfoss Flomatic also offers gate valves that meet the AWWA C509 Gate Valve standard. This new bulletin explains the AWWA C515 Gate Valve’s features and benefits, dimensions and also suggested specifications.

For more information, please call Danfoss Flomatic Corporation at 1-800-833-2040. You will also find detailed information on these products and all of their products at [www.flomatic.com](http://www.flomatic.com) or please feel free to email them at [flomatic@flomatic.com](mailto:flomatic@flomatic.com)