

Stainless Steel Check Valve

Model 812XT




Fromatic Corporation

Sizes 3" & 4" / 75mm & 100mm



Materials

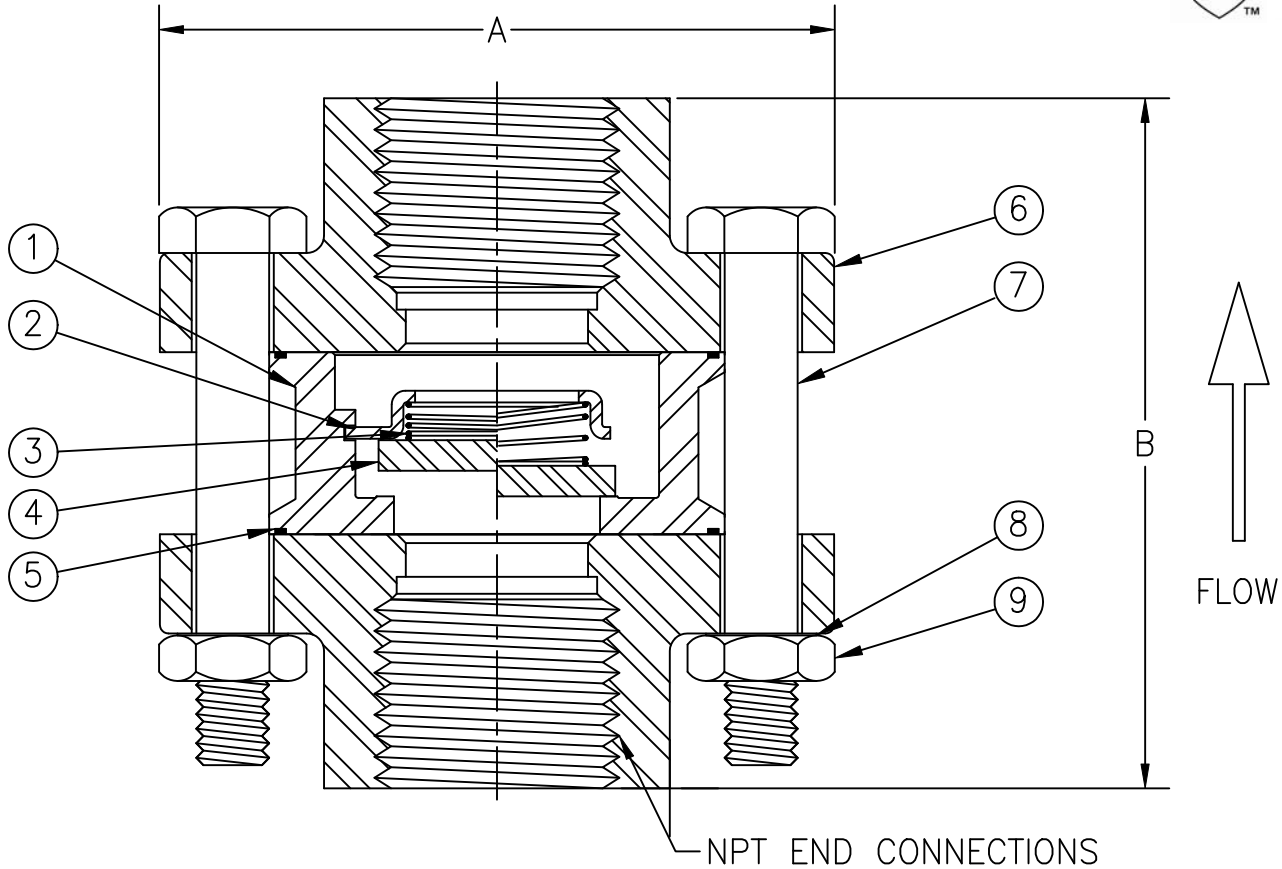

Max Temp 180°F (82°C)
Max Pressure 600psi (41bar)

Item #	Qty	Description	Material	ASTM
1	1	Body	Stainless Steel	316
2	1	Spring Retainer	Stainless Steel	316
3	1	Spring	Stainless Steel	316
4	1	Disc	Stainless Steel	316
5	2	Seal	PTFE	-----
6	2	Flange	Stainless Steel	316
7	A/R	Hex Head Bolt	Stainless Steel	316
8	A/R	Washer	Stainless Steel	316
9	A/R	Hex Head Nut	Stainless Steel	316

Dimensions

ALSO AVAILABLE WITH SOCKET WELD END CONNECTIONS - MODEL 812XS

Size		Part #	A		B		Weight	
Inch	mm		Inch	mm	Inch	mm	lbs	kg
3	75	2427XT	7.75	197	6.13	156	24	10.9
4	100	2428XT	8.81	224	7.25	184	38	17.2

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited.



March 6, 1995
Dwg No: S812XT-2 Rev: E (7/13)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798