
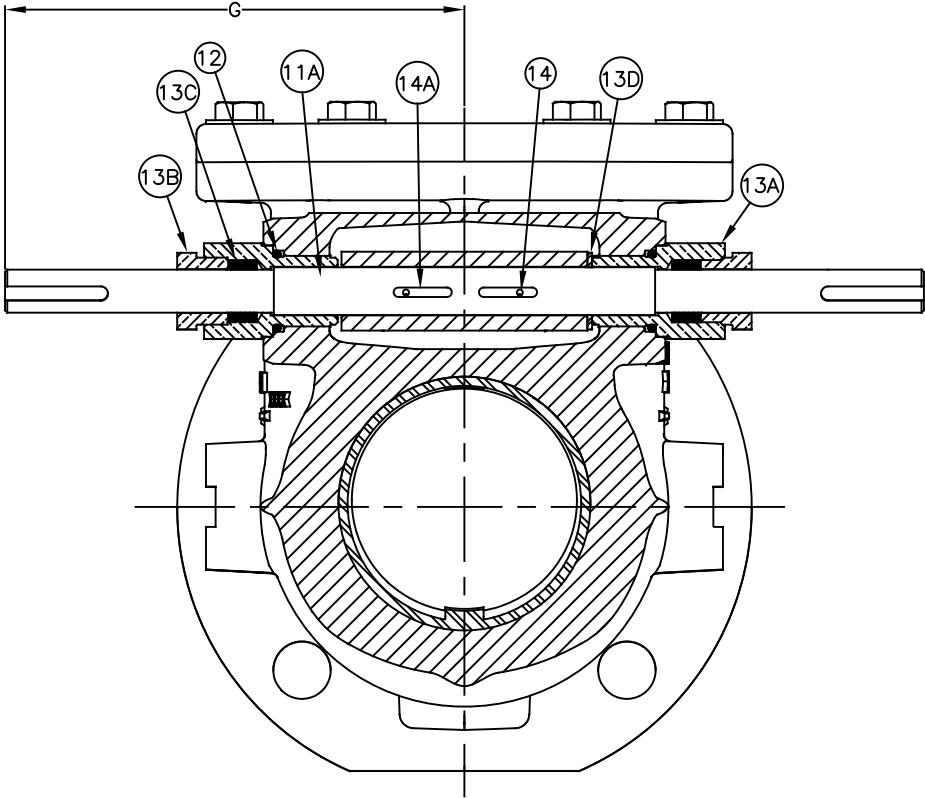


Swing Check Valves

Size 3" / 75 mm
AIS COMPLIANT

Model 92 **FLOMATIC**
Flomatic Corporation

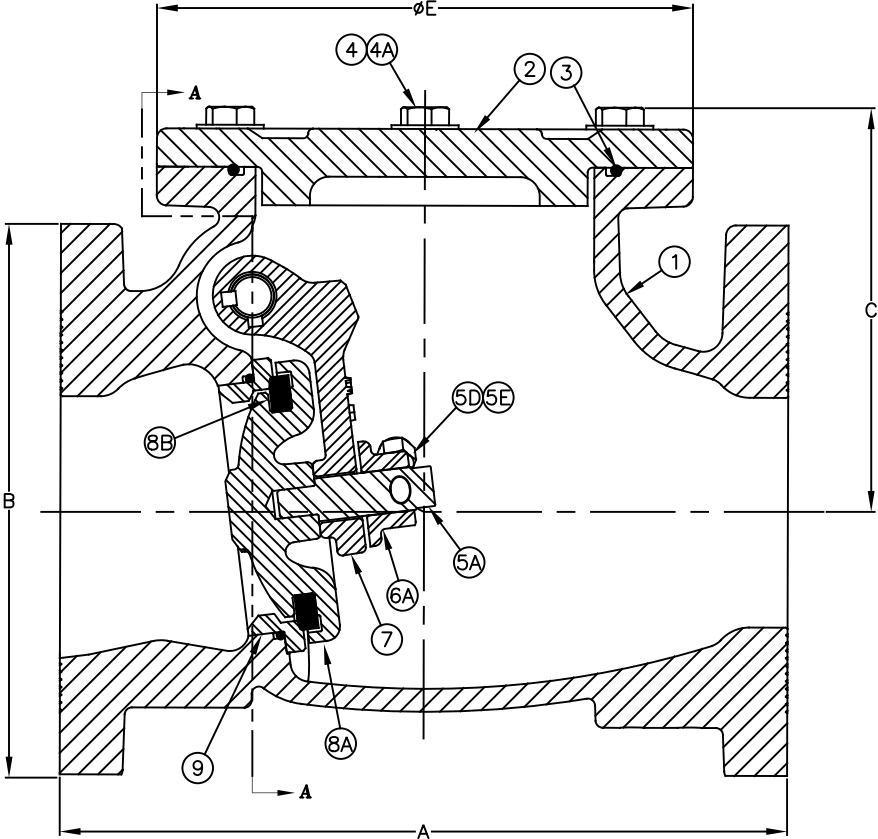

MANUFACTURED IN COMPLIANCE WITH AWWA C508 STANDARD

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2023 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

Swing Check Valve


Sizes 3" / 75 mm
AIS COMPLIANT

Model 92

FLOMATIC®

Flomatic Corporation

Materials

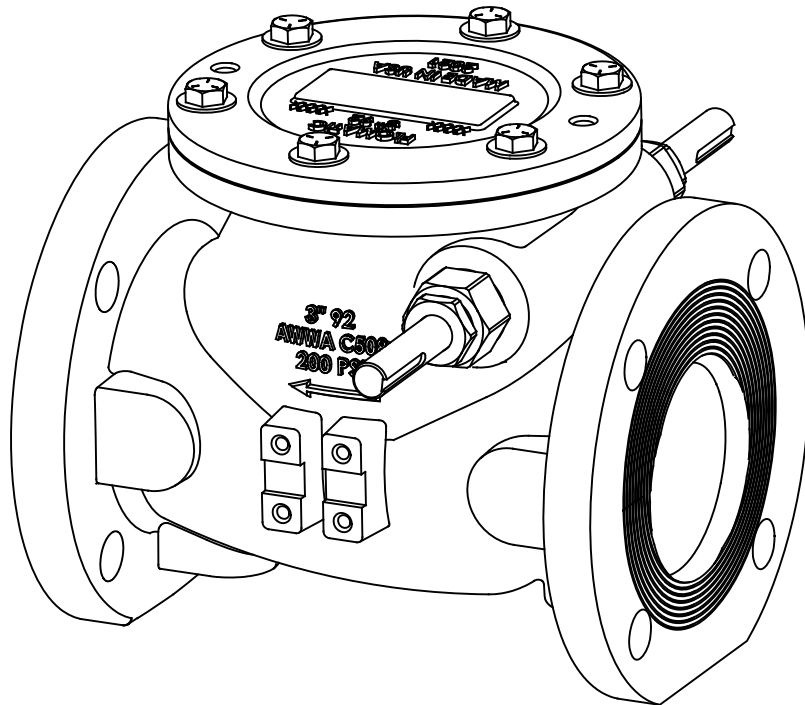

Max Temp 180°F (82°C) Max
Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body*	Ductile Iron	65-45-12	8B	1	Disc	Buna-N	-----
2	1	Cover*	Ductile Iron	65-45-12	9	1	Seat Ring	Stainless Steel	304
3	1	O'Ring (Cover)	Buna-N	N6000AA	10	1	Seat Ring O'Ring	Buna-N	N6000AA
4	6	Cover Bolt	Stainless Steel	18-8	11	1	Clapper Support Shaft	Stainless Steel	17-4
4A	6	Cover Washer	Stainless Steel	18-8	12	2	Bearing O'Ring	Buna-N	N6000AA
5A	1	Clapper Bolt	Stainless Steel	316	13A	2	Shaft Support Bearing	Bronze	B140
5D	1	Clapper Shoulder Screw	Stainless Steel	316	13B	2	Packing Nut	Bronze	B140
5E	1	Clapper Hex Nut	Stainless Steel	316 / Nylon	13C	6	Teflon Packing	Teflon	-----
6A	1	Clapper Nut	Stainless Steel	304	13D	2	Shaft Washer	Stainless Steel	316
7	1	Clapper Arm*	Ductile Iron	65-45-12	14	2	Screw	Stainless Steel	316
8A	1	Clapper Disc Holder*	Ductile Iron	65-45-12	14A	3	Key Stock	Stainless Steel	18-8

* Epoxy Coated

Dimensions (150# ANSI B16.42 Flanges)

MANUFACTURED IN COMPLIANCE WITH AWWA C508 STANDARD

Size		Part #	A		B		C		D		ØE		G		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
3	75	3706L	9-1/2	241	8-23/32	222	5-1/8	130	6-37/64	167	7	178	6	152	51	23

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2023 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC® VALVES

Page 2 of 2
April 10, 2023
Dwg No: S3706L Rev: 0

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798